

FEATURES


- ## VOLTAGE RANGE

50 to 1000 Volts

CURRENT

4.0 Amperes

RS-4L

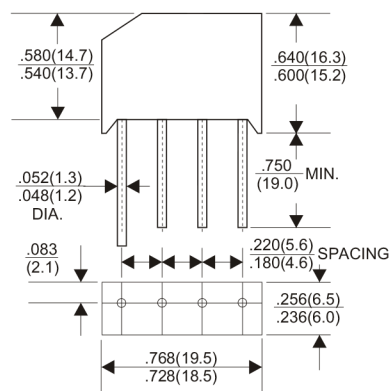

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

[illegible]

RATING AND CHARACTERISTIC CURVES (RS401L THRU RS407L)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

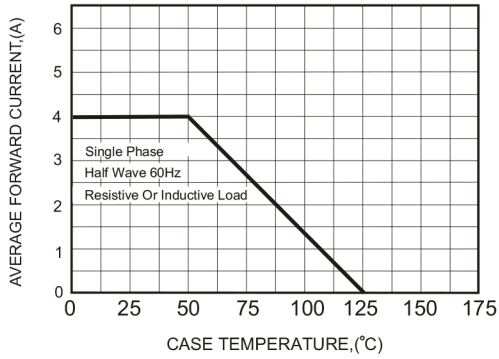


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

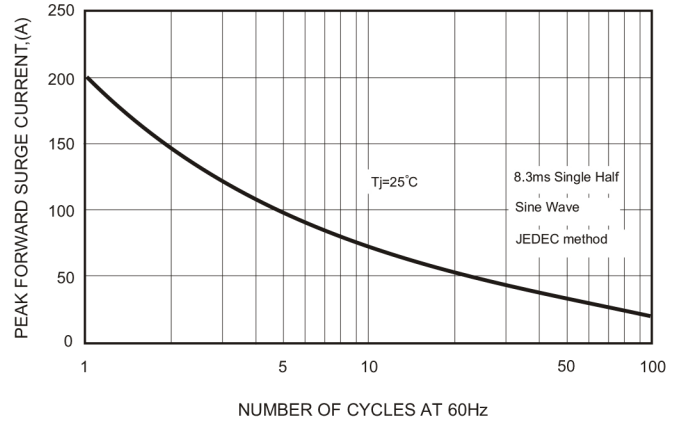


FIG.3-TYPICAL FORWARD CHARACTERISTICS

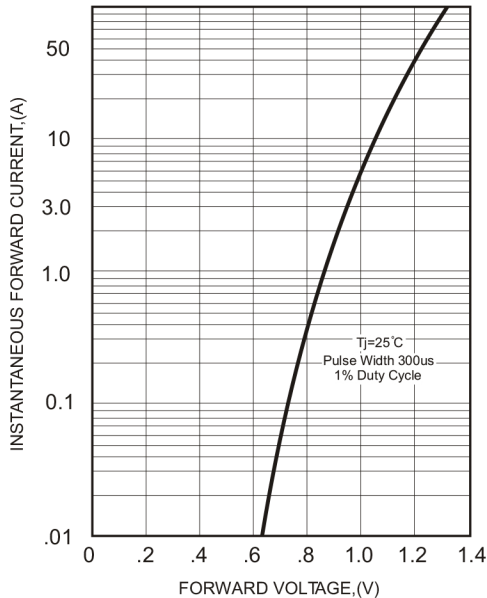


FIG.4-TYPICAL REVERSE CHARACTERISTICS

